

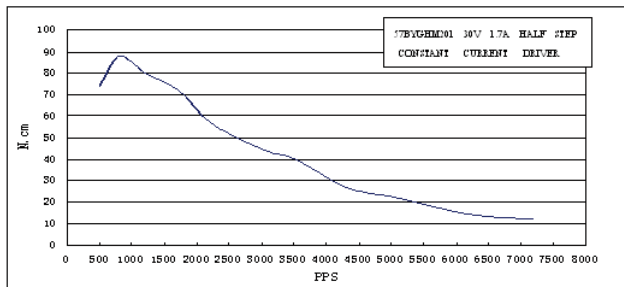


Schrittmotor PSM57BYGHM201

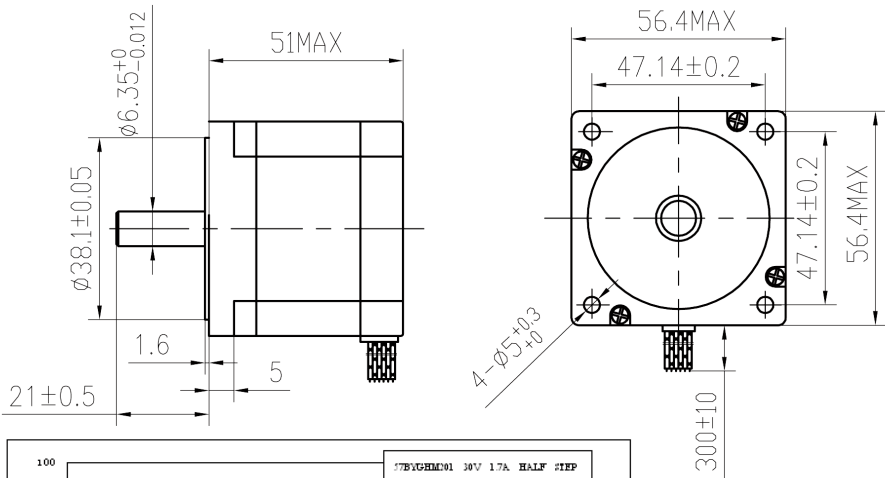

PHASE	2 PHASE
STEP ANGLE	0.9 ± 5% ° /STEP
VOLTAGE	6.8V
CURRENT	1.7 A/PHASE
RESISTANCE	4 ± 10% Ω/PHASE
INDUCTANCE	14 ± 20% mH/PHASE
HOLDING TORQUE	90 N.cm Min
DETENT TORQUE	2.6N.cm Max
INSULATION CLASS	B
LEAD STYLE	AWG22 UL1007
ROTOR TORQUE	240 g.cm ²