

power light source

Luxeon® Star

Technical Datasheet DS23

Luxeon is a revolutionary, energy efficient and ultra compact new light source, combining the lifetime and reliability advantages of Light Emitting Diodes with the brightness of conventional lighting.

Luxeon features one or more power light sources mounted onto an aluminum-core printed circuit board, allowing for ease of assembly, optimum cooling and accurate light center positioning.

For tight beams, optional and highly efficient collimating optics are available.

Luxeon Power Light Sources give you total design freedom and unmatched brightness, creating a new world of light.

For high volume applications, custom Luxeon power light source designs are available upon request, to meet your specific needs.



Luxeon Star is available in white, warm white, green, blue, royal blue, cyan, red, red-orange and amber.

Features


- Highest Flux per LED family in the world
- Very long operating life (up to 100k hours)
- Available in White, Green, Blue, Royal Blue, Cyan, Red, Red-Orange and Amber
- Lambertian, Batwing, Side Emitting or Collimated Radiation Pattern
- More Energy Efficient than Incandescent and most Halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100 ns)
- Fully dimmable
- No UV
- Superior ESD protection

Typical Applications

- Reading lights (car, bus, aircraft)
- Portable (flashlight, bicycle)
- Orientation
- Mini-accent
- Decorative
- Fiber Optic Alternative
- Appliance
- Sign and Channel Letter
- Architectural Detail
- Cove Lighting
- Automotive Exterior (Stop-Tail-Turn, CHMSL, Mirror Side Repeat)
- Edge-Lit Signs (Exit, Point Of Sale)

Mechanical Dimensions


Luxeon Star

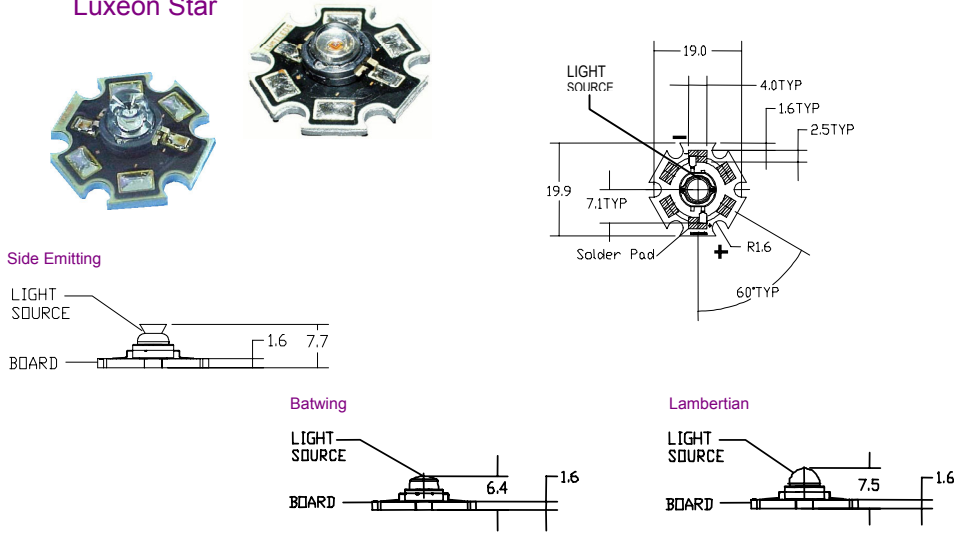

Notes:

1. Slots in aluminum-core PCB for M3 or #4 mounting screw.
2. Electrical interconnection pads labeled on the aluminum-core PCB with "+" and "-" to denote positive and negative, respectively. All positive pads are interconnected, as are all negative pads, allowing for flexibility in array interconnection.
3. Drawings not to scale.
4. All dimensions are in millimeters.


Luxeon Star Warm White

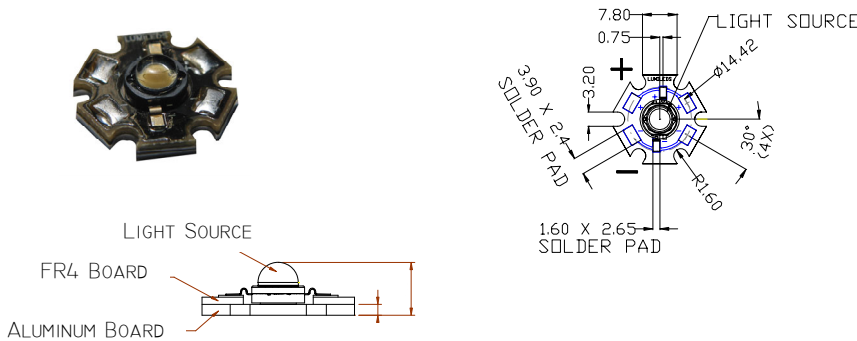

Notes:

1. Slots in aluminum-core PCB for M3 or #4 mounting screw.
2. Electrical interconnection pads labeled on the aluminum-core PCB with "+" and "-" to denote positive and negative, respectively. All positive pads are interconnected, as are all negative pads, allowing for flexibility in array interconnection.
3. Electrical insulation between neighboring Stars is required - aluminum board is not electrically neutral.
4. Drawings not to scale.
5. All dimensions are in millimeters.

Luxeon Star/C



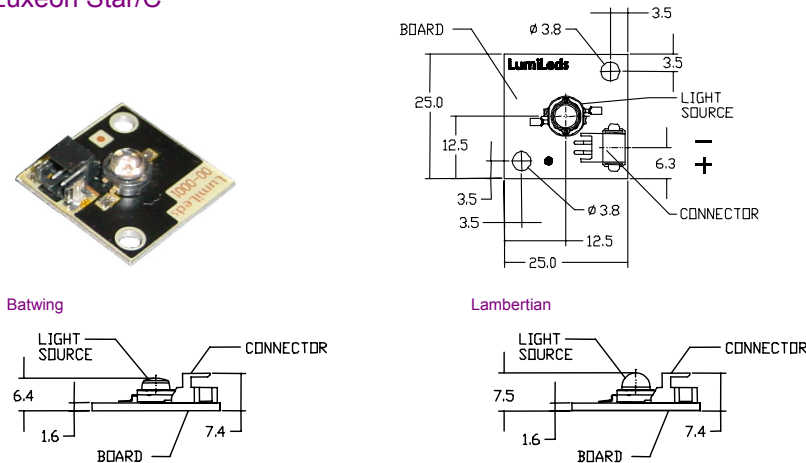


Notes:

1. Holes in aluminum-core PCB for M3 or #4 mounting screw.
2. Connector on board AMP type, code 2-179123-2 ; Mating connector - AMP receptacle housing assembly, code 173977-2.
3. Positive and negative pins in connector are as indicated on the drawing.
4. Drawings not to scale.
5. All dimensions are in millimeters.

Mechanical Dimensions



Luxeon Star/IDC



Notes:

1. Slots in aluminum-core PCB for M3 or #4 mounting screw.
2. Connectors on board Zierick type, code 1245T; accepts #26-18 AWG wire. Compatible with Zierick manual wire insertion tool WTP-4ALL and pneumatic production tool WTPPS-1208-1.
3. Positive and negative IDC connectors are indicated with a "+" and a "-" on the aluminum-core PCB, respectively.
4. Drawings not to scale.
5. All dimensions are in millimeters.

Luxeon Star/O

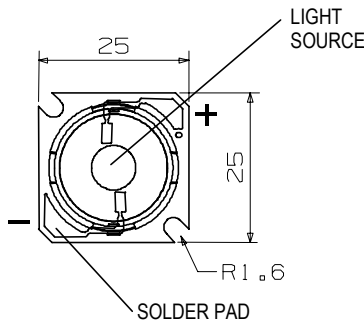

Notes:

1. Slots in aluminum-core PCB for M3 or #4 mounting screw.
2. Positive solder pad is indicated by a copper dot next to the pad on the aluminum-core PCB.
3. The collimator is molded from optical grade acrylic. Do not subject to temperatures greater than 75°C, as plastic deformation may occur. Protect optic against exposure to solvents and adhesives that are not compatible with acrylic.
4. Drawings not to scale.
5. All dimensions are in millimeters.

Part Number Matrix

COLOR	STAR	STAR/C	STAR/O ⁽¹⁾	STAR/IDC ⁽²⁾	BEAM PATTERN	
WHITE ⁽³⁾	LXHL-MW I C	LXHL-MW I A	LXHL-NW98	LXHL-MW I E	BATWING	
WHITE ⁽³⁾	LXHL-MWEC	LXHL-MWEA	LXHL-NWE8	N/A		
WARM WHITE	LXHL-MWGC	N/A	LXHL-NWG8	N/A		
GREEN	LXHL-MM I C	LXHL-MM I A	LXHL-NM98	LXHL-MM I E		
CYAN	LXHL-ME I C	LXHL-ME I A	LXHL-NE98	LXHL-ME I E		
BLUE	LXHL-MB I C	LXHL-MB I A	LXHL-NB98	LXHL-MB I E		
ROYAL BLUE	LXHL-MRRC	LXHL-MRRA	LXHL-NRR8	LXHL-MR I E		
Red	LXHL-MD I C	LXHL-MD I A	LXHL-ND98	LXHL-MD I E		
RED	LXHL-MDAC	N/A	N/A	N/A		
RED-ORANGE	LXHL-MHAC	N/A	N/A	N/A		
AMBER	LXHL-ML I C	LXHL-ML I A	LXHL-NL98	LXHL-ML I E		
AMBER	LXHL-MLAC	N/A	N/A	N/A		
WHITE	LXHL-MW I D	LXHL-MW I B	N/A	N/A		LAMBERTIAN
GREEN	LXHL-MM I D	LXHL-MM I B	N/A	N/A		
CYAN	LXHL-ME I D	LXHL-ME I B	N/A	N/A		
BLUE	LXHL-MB I D	LXHL-MB I B	N/A	N/A		
ROYAL BLUE	LXHL-MRRD	LXHL-MRRB	N/A	N/A		
Red	LXHL-MD I D	LXHL-MD I B	LXHL-ND94	N/A		
RED-ORANGE	LXHL-MH I D	LXHL-MH I B	LXHL-NH94	N/A		
AMBER	LXHL-ML I D	LXHL-ML I B	LXHL-NL94	N/A		
WHITE	LXHL-FW I C	N/A	N/A	N/A	SIDE EMITTING	
GREEN	LXHL-FM I C	N/A	N/A	N/A		
CYAN	LXHL-FE I C	N/A	N/A	N/A		
BLUE	LXHL-FB I C	N/A	N/A	N/A		
ROYAL BLUE	LXHL-FR I C	N/A	N/A	N/A		
Red	LXHL-FD I C	N/A	N/A	N/A		
RED-ORANGE	LXHL-FH I C	N/A	N/A	N/A		
AMBER	LXHL-FL I C	N/A	N/A	N/A		

Flux Characteristics at 350mA, Junction Temperature, T_J = 25°C

COLOR	MINIMUM LUMINOUS FLUX (lm) OR RADIOMETRIC POWER (mW) Φ _v ^(1,2)	TYPICAL LUMINOUS FLUX (lm) OR RADIOMETRIC POWER (mW) Φ _v ⁽²⁾	RADIATION PATTERN	
WHITE (MW I C, MW I A, NW98 & MW I E)	13.9	25	BATWING	
WHITE (LXHL-MWEC, MWEA & NWE8)	18.1	31		
WARM WHITE	13.9	20		
GREEN	18.1	40		
CYAN	18.1	40		
BLUE ⁽³⁾	6.3	12		
ROYAL BLUE ⁽⁴⁾	85 mW	175 mW		
Red (MD I C)	13.9	27		
RED (MDAC)	30.6	42		
RED-ORANGE	39.8	55		
AMBER (ML I C)	10.7	25		
AMBER (MLAC)	23.5	42		
WHITE	18.1	31		LAMBERTIAN
GREEN	18.1	40		
CYAN	18.1	40		
BLUE ⁽³⁾	6.3	12		
ROYAL BLUE ⁽⁴⁾	5 mW	175 mW		
Red	30.6	44		
RED-ORANGE	39.8	55		
AMBER	23.5	42		
WHITE	18.1	28	SIDE EMITTING	
GREEN	18.1	36		
CYAN	18.1	36		
BLUE ⁽³⁾	6.3	11		
ROYAL BLUE ⁽⁴⁾	85 mW	160 mW		
Red	30.6	40		
RED-ORANGE	39.8	50		
AMBER	23.5	38		

Notes:

- Star/O produces a narrow collimated beam due to the inclusion of the collimating optic. In red, red-orange, and amber the Star/O listed under lambertian radiation pattern is higher in luminous output, although the collimated beam pattern is similar to the Star/O products based on the batwing emitter.
- Star/IDC available in the batwing radiation pattern only. The wide angle of optical output from a lambertian or side emitting device results in significant light loss due to the IDC connectors in the optical path.
- In July 2003 Lumileds announced a second line of white batwing products using a new phosphor deposition process resulting in improved color uniformity. These new batwing emitters (LXHL-BW02) are incorporated into Luxeon Star part numbers LXHL-MWEC, LXHL-MWEA and LXHL-NWE8. Other white Luxeon Star products are based on the LXHL-BW01 Luxeon Emitter.

Notes:

- Minimum luminous flux or radiometric power performance guaranteed within published operating conditions. Lumileds maintains a tolerance of ± 10% on flux and power measurements.
- Flux and power values for Luxeon Star without secondary optics. The efficiency of collimating optics is approximately 85%. Luxeon types with even higher luminous flux levels will become available in the future. Please consult your Lumileds Authorized Distributor or Lumileds sales representative for more information.
- Minimum flux value for 470 nm devices. Due to the CIE eye response curve in the short blue wavelength range, the minimum luminous flux will vary over the Lumileds' blue color range. Luminous flux will vary from a minimum of 4.9 lm at 460 nm to a typical of 20 lm at 480 nm due to this effect. Although the luminous power efficiency is lower in the short blue wavelength range, radiometric power efficiency increases as wavelength decreases. For more information, consult the Luxeon Design Guide, available upon request.
- Royal Blue product is binned by radiometric power and peak wavelength rather than photometric lumens and dominant wavelength.

Optical Characteristics at 350mA, Junction Temperature, $T_J = 25^\circ\text{C}$

COLOR	DOMINANT WAVELENGTH ⁽¹⁾ λ_D , PEAK WAVELENGTH ⁽²⁾ λ_P , OR COLOR TEMPERATURE ⁽³⁾ CCT			SPECTRAL HALF-WIDTH ⁽⁴⁾ (nm) $\Delta\lambda_{1/2}$	TEMPERATURE COEFFICIENT OF DOMINANT WAVELENGTH (nm/ $^\circ\text{C}$) $\Delta\lambda_D/\Delta T_J$
	MIN.	TYP.	MAX.		
WHITE (MW1C, MW1A, NW98 & MW1E)	4500 K	5500 K	8000 K	----	----
WHITE (LXHL-MWEC, MWEA & NWE8)	4500 K	5500 K	10000 K	----	----
WARM WHITE	2850K	3300K	3800K	----	----
GREEN	520 nm	530 nm	550 nm	35	0.04
CYAN	490 nm	505 nm	520 nm	30	0.04
BLUE	460 nm	470 nm	490 nm	25	0.04
ROYAL BLUE ⁽²⁾	440 nm	455 nm	460 nm	20	0.04
RED	620.5 nm	625 nm	645.0 nm	20	0.05
RED-ORANGE	612.5 nm	617 nm	620.5 nm	20	0.06
AMBER	587.5 nm	590 nm	597.0 nm	14	0.09

Optical Characteristics at 350mA, Junction Temperature, $T_J = 25^\circ\text{C}$, Continued

RADIATION PATTERN	COLOR	LUXEON STAR & LUXEON STAR/C		LUXEON STAR/O (WITH OPTICS)		TYPICAL CANDELA ON AXIS ⁽⁷⁾ (cd)
		TOTAL INCLUDED ANGLE ⁽⁵⁾ (DEGREE) $\theta_{0.90V}$	VIEWING ANGLE ⁽⁶⁾ (DEGREE) 20 1/2	TOTAL INCLUDED ANGLE ⁽⁵⁾ (DEGREE) $\theta_{0.90V}$	VIEWING ANGLE ⁽⁶⁾ (DEGREE) 20 1/2	
BATWING	WHITE (ALL EXCEPT NWE8)	110	110	25	10	250
	WHITE (NWE8)	110	110	25	10	500
	WARM WHITE	110	110	25	10	200
	GREEN	110	110	25	10	600
	CYAN	110	110	25	10	600
	BLUE	110	110	25	10	200 ⁽⁷⁾
	ROYAL BLUE	110	110	25	10	120
	RED (MD1C)	110	110	25	10	810
	RED (MDAC)	110	110	N/A	N/A	N/A
	RED-ORANGE	110	110	N/A	N/A	N/A
	AMBER (ML1C)	110	110	25	10	750
	AMBER (MLAC)	110	110	N/A	N/A	N/A
LAMBERTIAN	WHITE	160	140	N/A	N/A	N/A
	GREEN	160	140	N/A	N/A	N/A
	CYAN	160	140	N/A	N/A	N/A
	BLUE	160	140	N/A	N/A	N/A
	ROYAL BLUE	160	140	N/A	N/A	N/A
	RED	160	140	25	10	660
	RED-ORANGE	160	140	25	10	825
	AMBER	160	140	25	10	640

Optical Characteristics at 350mA, Junction Temperature, $T_J = 25^\circ\text{C}$, Continued

RADIATION PATTERN	COLOR	TYPICAL TOTAL FLUX PERCENT WITHIN FIRST 45 ⁽⁸⁾	TYPICAL ANGLE OF PEAK INTENSITY ⁽⁹⁾
		CUM Φ_{45°	θ_{PEAK}
SIDE EMITTING	WHITE	< 15%	75° - 85°
	GREEN	< 15%	75° - 85°
	CYAN	< 15%	75° - 85°
	BLUE	< 15%	75° - 85°
	ROYAL BLUE	< 15%	75° - 85°
	RED	< 15%	75° - 85°
	RED-ORANGE	< 15%	75° - 85°
	AMBER	< 15%	75° - 85°

Notes: (for all three optical tables)

- Dominant wavelength is derived from the CIE 1931 Chromaticity diagram and represents the perceived color. Lumileds maintains a tolerance of $\pm 0.5\text{nm}$ for dominant wavelength measurements.
- Royal Blue product is binned by radiometric power and peak wavelength rather than photometric lumens and dominant wavelength. Lumileds maintains a tolerance of $\pm 2\text{nm}$ for peak wavelength measurements.
- CCT $\pm 5\%$ tester tolerance.
- Spectral width at $1/2$ of the peak intensity.
- Total angle at which 90% of total luminous flux is captured.
- $\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is $1/2$ of the peak value.
- Typical candela on axis for 470 nm devices. Due to the CIE eye response curve in the short blue wavelength range, candela values will vary over Lumileds' blue color range.
- Cumulative flux percent within $\pm 45^\circ$ from optical axis.
- CRI (Color Rendering Index) for white product types is 70. CRI for warm white product types is 90 with typical R_9 value of 70.
- Off axis angle from lamp centerline where the luminous intensity reaches the peak value.
- All red, red-orange and amber products built with Aluminum Indium Gallium Phosphide (AlInGaP).
- All white, green, cyan, blue and royal blue products built with Indium Gallium Nitride (InGaN).
- Blue and Royal Blue power light sources represented here are IEC825 Class 2 for eye safety.

Electrical Characteristics at 350mA, Junction Temperature, $T_J = 25^\circ\text{C}$

RADIATION PATTERN	COLOR	FORWARD VOLTAGE V_F (V) ^[1]			DYNAMIC RESISTANCE ^[2] (Ω) R_D	TEMPERATURE COEFFICIENT OF FORWARD VOLTAGE ^[3] (mV/ $^\circ\text{C}$) $\Delta V_F / \Delta T_J$	THERMAL RESISTANCE, JUNCTION TO BOARD ($^\circ\text{C}/\text{W}$) $R_{\theta JB}$
		MIN.	TYP.	MAX.			
BATWING	WHITE	2.79	3.42	3.99	1.0	-2.0	20
	WARM WHITE	2.79	3.42	3.99	1.0	-2.0	20
	GREEN	2.79	3.42	3.99	1.0	-2.0	20
	CYAN	2.79	3.42	3.99	1.0	-2.0	20
	BLUE	2.79	3.42	3.99	1.0	-2.0	20
	ROYAL BLUE	2.79	3.42	3.99	1.0	-2.0	20
	RED (MD1O)	2.31	2.85	3.27	2.4	-2.0	20
	RED (MDAC)	2.31	2.95	3.51	2.4	-2.0	23
	RED-ORANGE	2.31	2.95	3.51	2.4	-2.0	23
	AMBER (ML1O)	2.31	2.85	3.27	2.4	-2.0	20
AMBER (MLAC)	2.31	2.95	3.51	2.4	-2.0	23	
LAMBERTIAN	WHITE	2.79	3.42	3.99	1.0	-2.0	20
	GREEN	2.79	3.42	3.99	1.0	-2.0	20
	CYAN	2.79	3.42	3.99	1.0	-2.0	20
	BLUE	2.79	3.42	3.99	1.0	-2.0	20
	ROYAL BLUE	2.79	3.42	3.99	1.0	-2.0	20
	RED	2.31	2.95	3.51	2.4	-2.0	23
	RED-ORANGE	2.31	2.95	3.51	2.4	-2.0	23
AMBER	2.31	2.95	3.51	2.4	-2.0	23	
SIDE EMITTING	WHITE	2.79	3.42	3.99	1.0	-2.0	20
	GREEN	2.79	3.42	3.99	1.0	-2.0	20
	CYAN	2.79	3.42	3.99	1.0	-2.0	20
	BLUE	2.79	3.42	3.99	1.0	-2.0	20
	ROYAL BLUE	2.79	3.42	3.99	1.0	-2.0	20
	RED	2.31	2.95	3.51	2.4	-2.0	23
	RED-ORANGE	2.31	2.95	3.51	2.4	-2.0	23
AMBER	2.31	2.95	3.51	2.4	-2.0	23	

Notes:

1. Lumileds maintains a tolerance of $\pm 0.06\text{V}$ on forward voltage measurements.
2. Dynamic resistance is the inverse of the slope in linear forward voltage model for LEDs. See Figures 3a and 3b.
3. Measured between $25^\circ\text{C} \leq T_J \leq 110^\circ\text{C}$ at $I_F = 350\text{mA}$.

Absolute Maximum Ratings

PARAMETER	WHITE/GREEN/ CYAN/BLUE/ ROYAL BLUE	WARM WHITE	RED/AMBER/ RED-ORANGE
DC FORWARD CURRENT (mA) ^[1]	350	350	385
PEAK PULSED FORWARD CURRENT (mA)	500	500	550
AVERAGE FORWARD CURRENT (mA)	350	350	350
ESD SENSITIVITY ^[2]	$\pm 16,000\text{V HBM}$		
LED JUNCTION TEMPERATURE ($^\circ\text{C}$)	135	120	120
ALUMINUM-CORE PCB TEMPERATURE ($^\circ\text{C}$)	105	105	105
STORAGE & OPERATING TEMPERATURE ($^\circ\text{C}$)			
LUXEON STAR	-40 to +105	-40 to +105	-40 to +105
LUXEON STAR/O ^[3]	-40 to +75	-40 to +75	-40 to +75

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum. For more information, consult the Luxeon Design Guide, available upon request.
2. LEDs are not designed to be driven in reverse bias. Please consult Lumileds' Application Brief AB11 for further information.
3. A reduction in maximum storage and operating temperature is required due to the acrylic optic.

Wavelength Characteristics, $T_J = 25^\circ\text{C}$

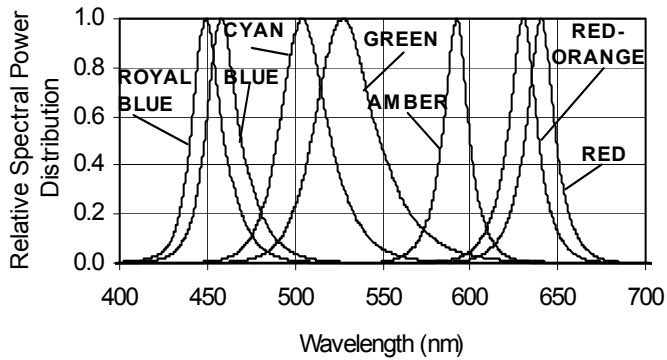


Figure 1a.
Relative Intensity vs. Wavelength.

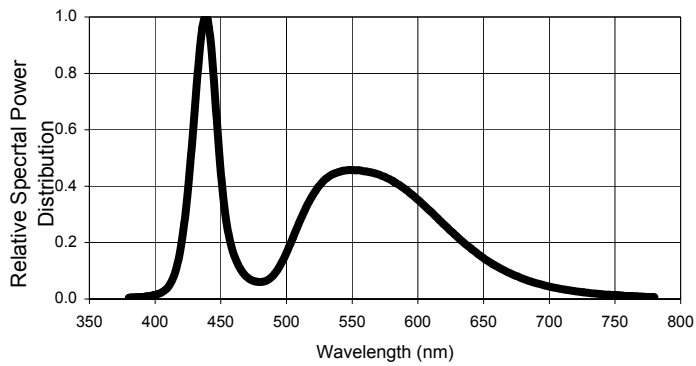


Figure 1b.
White Color Spectrum of Typical
5500K Part, Integrated
Measurement.

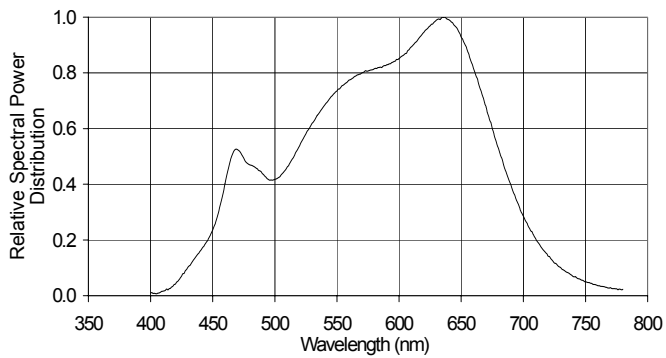


Figure 1c.
White Color Spectrum of Typical
Warm White Part, Integrated
Measurement. Applicable for
LXHL-MWGC and LXHL-NWG8.

Light Output Characteristics

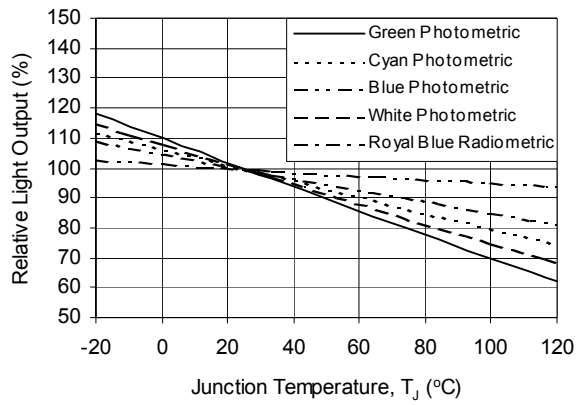


Figure 2a.
Relative Light Output vs. Junction Temperature for White, Warm White, Green, Cyan, Blue and Royal Blue.

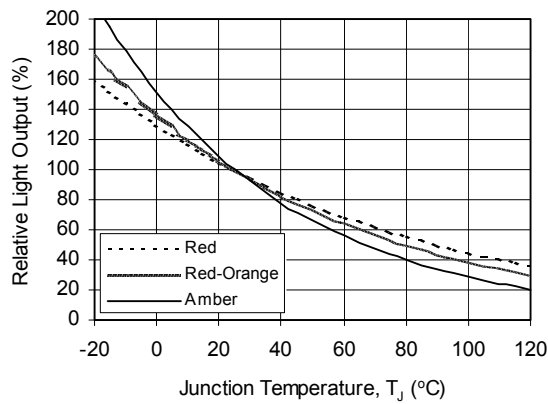


Figure 2b.
Relative Light Output vs. Junction Temperature for Red, Red-Orange and Amber.

Forward Current Characteristics, $T_J = 25^\circ\text{C}$

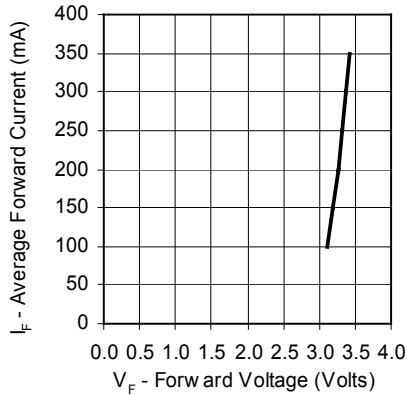


Figure 3a.
Forward Current vs. Forward Voltage for White, Warm White, Green, Cyan, Blue, and Royal Blue.

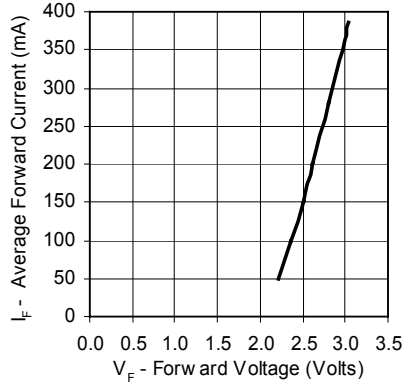


Figure 3b.
Forward Current vs. Forward Voltage for Red, Red-Orange and Amber.

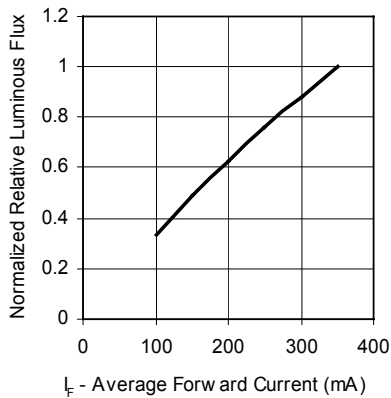


Figure 4a.
Relative Luminous Flux vs. Forward Current for White, Warm White, Green, Cyan, Blue, and Royal Blue at $T_J = 25^\circ\text{C}$ maintained.

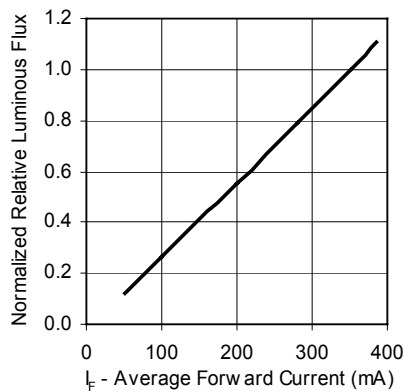


Figure 4b.
Relative Luminous Flux vs. Forward Current for Red, Red-Orange and Amber at $T_J = 25^\circ\text{C}$ maintained.

Note:

Driving these high power devices at currents less than the test conditions may produce unpredictable results and may be subject to variation in performance. Pulse width modulation (PWM) is recommended for dimming effects.

Current Derating Curves Star, Star/C, Star/IDC

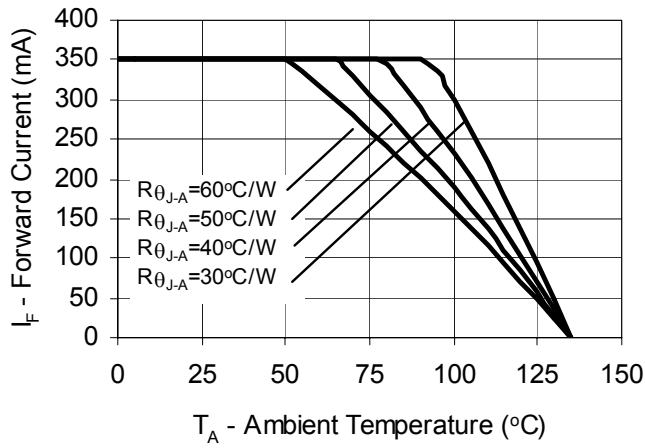


Figure 5a.
Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 135^\circ\text{C}$ for White, Green, Cyan, Blue, and Royal Blue.

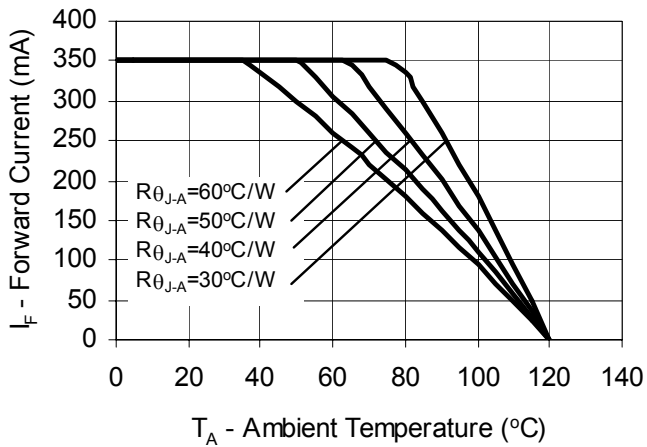


Figure 5b.
Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120^\circ\text{C}$ for Warm White,

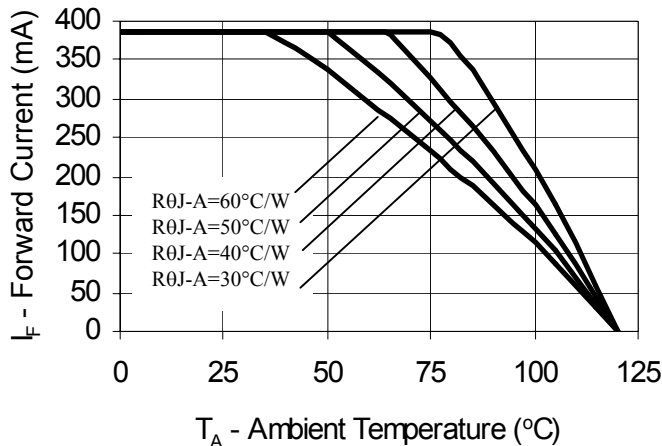


Figure 5c.
Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120^\circ\text{C}$ for Red, Red-Orange and Amber.

Current Derating Curves Star/O

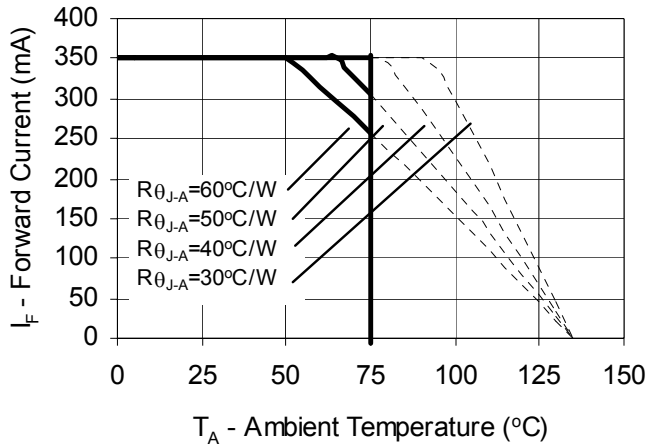


Figure 5d.
Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 135$ °C and $T_{AMBIENT MAX} = 75$ °C for White, Green, Cyan, Blue, and Royal Blue.

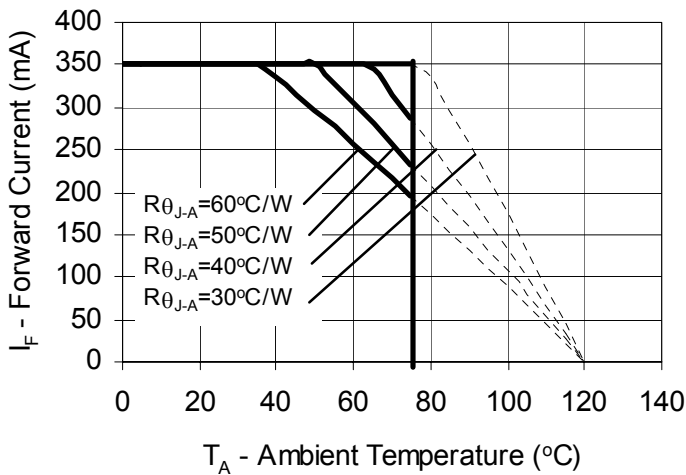


Figure 5e.
Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120$ °C and $T_{AMBIENT MAX} = 75$ °C for Warm White.

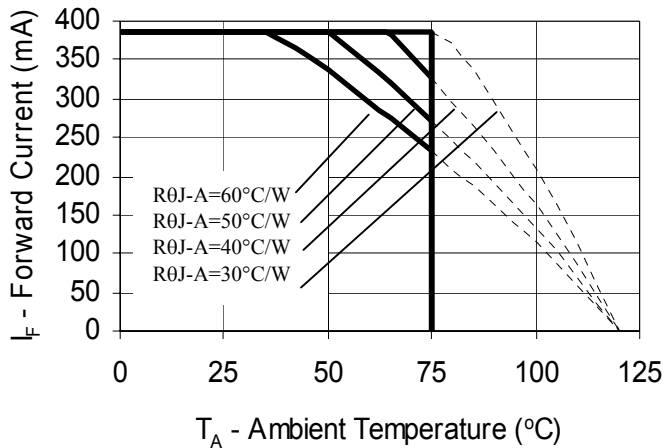


Figure 5f.
Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120$ °C and $T_{AMBIENT MAX} = 75$ °C for Red, Red-Orange and Amber.

Typical Representative Spatial Radiation Pattern

Batwing Radiation Pattern (without optics)

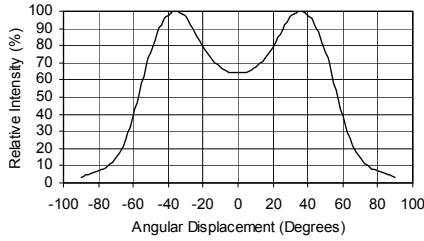


Figure 6a.
Typical Representative Spatial Radiation Pattern for Luxeon Star White (LXHL-MW1C, LXHL-MW1A, LXHL-MW1E) and Warm White (LXHL-MWGC).

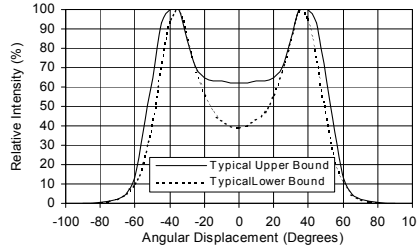


Figure 6b.
Typical Representative Spatial Radiation Pattern for Luxeon Star Green, Cyan, Blue, Royal Blue and White.

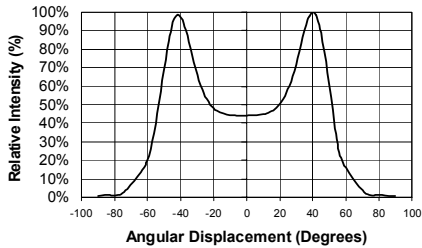


Figure 6c.
Typical Representative Spatial Radiation Pattern for Luxeon Star White (LXHL-BW02).

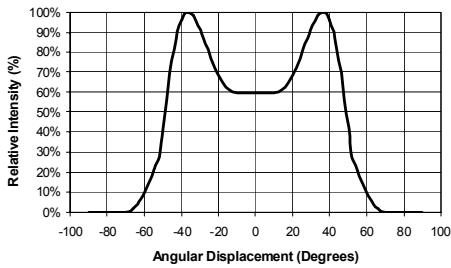


Figure 6d.
Typical Representative Spatial Radiation Pattern for Luxeon Star Red and Amber (LXHL-BD01 and LXHL-BL01)

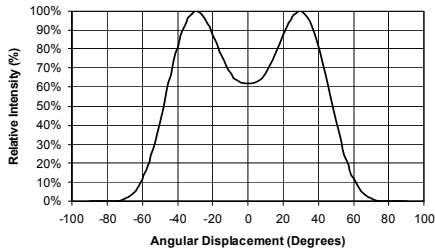


Figure 6e.
Typical Representative Spatial Radiation Pattern for Luxeon Star Red, Red-Orange and Amber (LXHL-BD03, BH03 and BL03).

Note:

For more detailed technical information regarding Luxeon radiation patterns, please consult your Lumileds Authorized Distributor or Lumileds sales representative.

Lambertian Radiation Pattern (without optics)

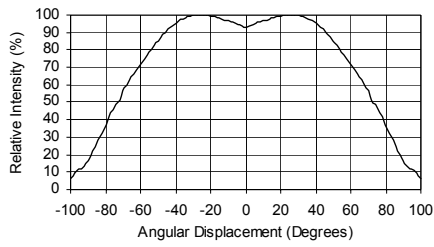


Figure 7a.
Typical Representative Spatial Radiation Pattern for Luxeon Star Red, Red-Orange and Amber.

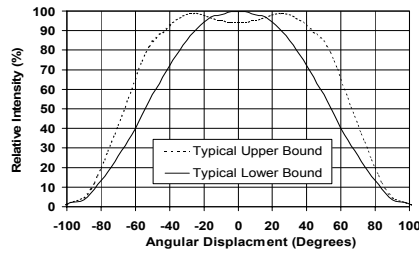


Figure 7b.
Typical Representative Spatial Radiation Pattern for Luxeon Star White Green, Cyan, Blue and Royal Blue.

Side Emitting Radiation Pattern (without optics)

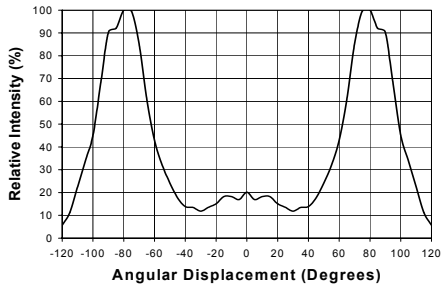


Figure 8a.
Typical Representative Spatial Radiation Pattern for Luxeon Star Red, Red-Orange and Amber.

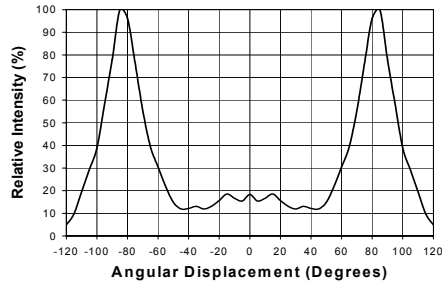


Figure 8b.
Typical Representative Spatial Radiation Pattern for Luxeon Star White, Green, Cyan, Blue and Royal Blue.

Typical Representative Spatial Radiation Pattern

Radiation Pattern (with optics)

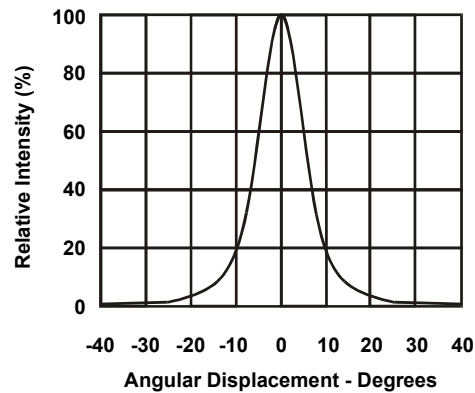


Figure 9.
Typical Representative Spatial
Radiation Pattern for Luxeon
Star/O (with optics), for all colors.

Average Lumen Maintenance Characteristics

Lifetime for solid-state lighting devices (LEDs) is typically defined in terms of lumen maintenance—the percentage of initial light output remaining after a specified period of time. Lumileds projects that Luxeon products will deliver on average 70% lumen maintenance at 50,000 hours of operation. This performance is based on independent test data, Lumileds historical data from tests run on similar material systems, and internal Luxeon reliability testing. This projection is based on constant current 350 mA operation with junction temperature maintained at or below 90°C. Observation of design limits included in this data sheet is required in order to achieve this projected lumen maintenance.

About Luxeon



Luxeon is the new world of solid-state lighting (LED) technology. Luxeon Power Light Source Solutions offer huge advantages over conventional lighting and huge advantages over other LED solutions. Luxeon enables partners to create and market products that, until now, were impossible to create. This means the opportunity to create products with a clear competitive advantage in the market. Products that are smaller, lighter, sleeker, cooler, and brighter. Products that are more fun to use, more efficient, and more environmentally conscious than ever before possible!

L U X E  N[®]

Company Information

Luxeon is developed, manufactured and marketed by Lumileds Lighting, U.S., LLC. Lumileds is a world-class supplier of Light Emitting Diodes (LEDs) producing billions of LEDs annually. Lumileds is a fully integrated supplier, producing core LED material in all three base colors (Red, Green, Blue) and White. Lumileds has R&D development centers in San Jose, California and Best, The Netherlands. Production capabilities in San Jose, California and Malaysia.

Lumileds is pioneering the high-flux LED technology and bridging the gap between solid-state LED technology and the lighting world. Lumileds is absolutely dedicated to bringing the best and brightest LED technology to enable new applications and markets in the lighting world.

Lumileds may make process or materials changes affecting the performance or other characteristics of Luxeon. These products supplied after such change will continue to meet published specifications, but may not be identical to products supplied as samples or under prior orders.



WWW.LUXEON.COM
WWW.LUMILEDSFUTURE.COM

FOR TECHNICAL ASSISTANCE OR THE LOCATION OF YOUR NEAREST SALES OFFICE CONTACT ANY OF THE FOLLOWING:

NORTH AMERICA:
+1 888 569 3662 OR
ASKLUXEON@FUTUREELECTRONICS.COM

EUROPE
00 800 443 88 873 OR
LUXEON.EUROPE@FUTUREELECTRONICS.COM

ASIA
800 5864 5337 OR
LUMILEDS.ASIA@FUTUREELECTRONICS.COM